

NOMIC-P



DE

Pendelleuchte, direkt-indirektstrahlend. Darklight- und Satin-raster, alternativ Wallwasher mit asymmetrischer Abstrahlung oder Linearprismendiffuser.

Leuchtenkörper aus Aluminium-Strangpress-Profil silbermatt natureloxiert. Optional weitere Farben (s. Oberflächenübersicht).

Elektronische Vorschaltgeräte wahlweise einfach schaltbar oder dimmbar (1-10V, DALI, Touch-Dim). Notlicht- und Sensortechnologie optional integrierbar (s. Übersicht).

Silver-Darklight-Raster aus hochglänzend eloxiertem Reinaluminium zur Erzielung höchster Wirkungsgrade.

Stufenlos höhenverstellbare Y-Seilabhangung mit transparent ummantelter Zuleitung und Baldachin silber.

Leuchtmittel exklusive.

Beachten Sie die Übersicht `optionale Ausfuhungen`

EN

Pendant luminaire with direct-indirect light distribution. Silver-Darklight and Satin louver for glare-free illumination, optional prismatic diffuser for uniform or wallwasher for asymmetrical light distribution.

Luminaire body made of aluminium-profile. Matt silver anodised. On request extensive range of alternative colours (see overview).

Electronic drivers which can optionally be switched together or dimmed (1-10V, DALI, Touch-Dim). Also available in emergency version or combined with sensor technology (see overview).

Silver Darklight louver made of pure aluminium in high specular finish to guarantee highest possible efficacies.

Height adjustable Y-cord suspension with transparent power supply cable and ceiling rose silver.

Only suitable for fluorescent, lamps excluded.

Refer to "options" overview

FR

Luminaire suspendu, clairage direct. Grille darklight ou satinee, en option wallwasher avec une diffusion asymetrique ou diffuseur prismatique lineaire.

Corps du luminaire en aluminium extrude, gris mat anodise. Couleurs supplementaires en option (voir annexe).

Ballast lectronique au choix: commutable ou graduable (1-10V, DALI, Touch-Dim). Combinaison possible avec module d'urgence et technologie de detecteur de presence (voir annexe).


Grille argent Darklight en aluminium anodise extremement brillant garantissant un rendement leve.

Suspension en Y reglable en hauteur avec cable d'alimentation transparent et patere saillie grise.

Agent lumineux non fourni.

Voir les differentes options


NOMIC-P / DIRECT-INDIRECT / DARKLIGHT LOUVER

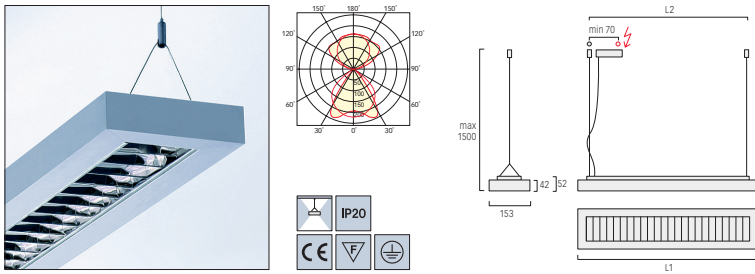

L1	L2	LAMPS	CODE	KG
FLUORESCENT				
1250	1040	T5 1x28/54W	NP1REET-128/54-YS	3,9
1552	1345	T5 1x35/49/80W	NP1REET-135/49/80-YS	4,7
1250	1040	T5 2x28/54W	NP1REET-228/54-YS	4,0
1552	1345	T5 2x35/49W	NP1REET-235/49-YS	4,8
1552	1345	T5 2x80W	NP1REET-280-YS	4,8
2428	2220	T5 2x1x28/54W	NP1REET-2-128/54-YS	7,2
3035	2828	T5 2x1x35/49W	NP1REET-2-135/49-YS	8,7
3035	2828	T5 2x1x80W	NP1REET-2-180-YS	8,7
2428	2220	T5 2x2x28/54W	NP1REET-2-228/54-YS	7,3
3035	2828	T5 2x2x35/49W	NP1REET-2-235/49-YS	8,8
3035	2828	T5 2x2x80W	NP1REET-2-280-YS	8,8

CONTROL E: NON DIMMABLE, D: DIM 1-10V, L: DIM DALI, H: TOUCH-DIM


NOMIC-P / DIRECT-INDIRECT / SATIN LOUVER

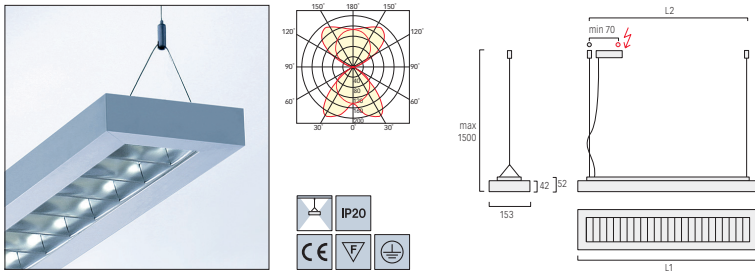

L1	L2	LAMPS	CODE	KG
FLUORESCENT				
1250	1040	T5 1x28/54W	NP1MEET-128/54-YS	3,9
1552	1345	T5 1x35/49/80W	NP1MEET-135/49/80-YS	4,7
1250	1040	T5 2x28/54W	NP1MEET-228/54-YS	4,0
1552	1345	T5 2x35/49W	NP1MEET-235/49-YS	4,8
1552	1345	T5 2x80W	NP1MEET-280-YS	4,8
2428	2220	T5 2x1x28/54W	NP1MEET-2-128/54-YS	7,2
3035	2828	T5 2x1x35/49W	NP1MEET-2-135/49-YS	8,7
3035	2828	T5 2x1x80W	NP1MEET-2-180-YS	8,7
2428	2220	T5 2x2x28/54W	NP1MEET-2-228/54-YS	7,3
3035	2828	T5 2x2x35/49W	NP1MEET-2-235/49-YS	8,8
3035	2828	T5 2x2x80W	NP1MEET-2-280-YS	8,8

CONTROL E: NON DIMMABLE, D: DIM 1-10V, L: DIM DALI, H: TOUCH-DIM

NOMIC-P / DIRECT-INDIRECT / LINEAR PRISM

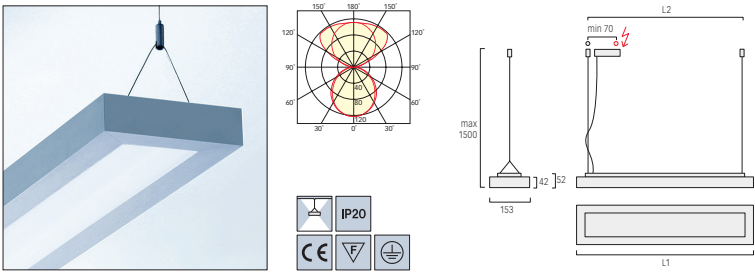


L1	L2	LAMPS	CODE	KG
FLUORESCENT				
1250	1040	T5 1x28/54W	NP1EET-128/54-YS	3,9
1552	1345	T5 1x35/49/80W	NP1EET-135/49/80-YS	4,7
1250	1040	T5 2x28/54W	NP1EET-228/54-YS	4,0
1552	1345	T5 2x35/49W	NP1EET-235/49-YS	4,8

CONTROL E: NON DIMMABLE, D: DIM 1-10V, L: DIM DALI, H: TOUCH-DIM

307


NOMIC-P / DIRECT / WALLWASHER

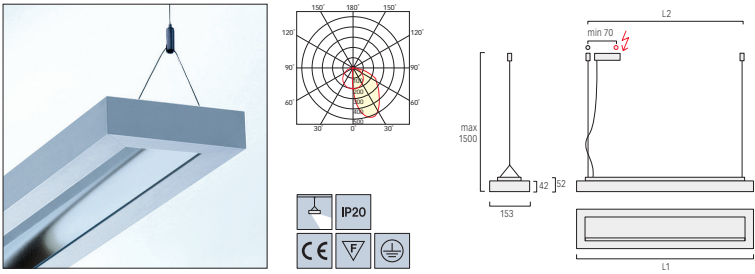

L1	L2	LAMPS	CODE	KG
FLUORESCENT				
1250	1040	T5 1x28/54W	NA1GEET-128/54-YS	3,7
1552	1345	T5 1x35/49/80W	NA1GEET-135/49/80-YS	4,5
2428	2220	T5 2x1x28/54W	NA1GEET-2-128/54-YS	7,0
3035	2828	T5 2x1x35/49W	NA1GEET-2-135/49-YS	8,5
3035	2828	T5 2x1x80W	NA1GEET-2-180-YS	8,5

CONTROL E: NON DIMMABLE, D: DIM 1-10V, L: DIM DALI, H: TOUCH-DIM

OPTIONAL



FURTHER SELECTED SURFACE DESIGNS: SEE PAGE 15



BLUETOOTH MODULE FOR WIRELESS CONTROL



EMERGENCY MODULE WITH 3 HOUR BATTERY



MULTISENSOR FOR DAYLIGHT AND PRESENCE CONTROL