

Bench C1 | 3-Phase Track



DE LED-Downlight-Strahler für 3-Phasen-Stromschienen. 345° drehbar. Leuchtenkörper aus Aluminiumprofil. Gehäuse-Außenfläche und Innendekor in unterschiedlichen Lackierungen und Kombinationen erhältlich, z.B. weiß, silber, graphit, schwarz, gold oder kupferfarben. Zu Oberflächenoptionen- und Kombinationen siehe Lightnet-Surface-Collection. Rückversetzte Zellenraster mit optimierter Blendungsbegrenzung speziell für Office-Anwendungen. Konverter in Stromschienenadapter integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI). Farbtemperatur 2200K, 2700K, 3000K, 3500K, 4000K oder 6500K. Binning initial $\leq$ MacAdam 3. Farbwiedergabe CRI $>$ 80, CRI $>$ 90 oder Full Spectrum.


EN LED downlight spotlight for 3-phase track systems. 345° rotation. Luminaire body made of aluminium profile. Outer housing and inner decor available in various finishes and combinations, e.g. white, silver, graphite, black, gold or copper-coloured. For surface options and combinations, see Lightnet-Surface-Collection. Recessed louvre grids with optimised glare control, especially for office environments. Driver integrated into the track adapter, optionally switchable or continuously dimmable (DALI). Colour temperature 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning $\leq$ MacAdam 3. Colour rendering CRI $>$ 80, CRI $>$ 90 or Full Spectrum.

E C1 LWE-8 30M-L455-WD

Product Family	E: Bench
Type	C1: 3-Phase Track
Optical System	L: Lens Louvre
Surface Finish	W: Snow White, V: Ivory White, S: Radiant Silver, A: Satin Silver, F: Anodic Silver, U: Urban Graphite, D: Anodic Black, B: Jet Black, H: Anodic Champagne, K: Satin Copper, X: Satin Bronze, M: Satin Cloud, R: Special Surface (please specify)
Control Gear	E: On/Off, L: DALI
Colour Rendering	8: CRI>80, 9: CRI>90, F: Full Spectrum [except 2200K]
Colour Temperature	22: 2200K, 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K
Power	M: Medium Power
Size	Luminaire Size in mm: L155, L305, B455, L455, L605
Adaptor	W: In-Track Electronic [white], B: In-Track Electronic [black]
Lens Louvre	W: Snow White, V: Ivory White, A: Satin Silver, F: Anodic Silver, D: Anodic Black, K: Satin Copper, G: Satin Gold, J: Satin Pale Gold, L: Satin Cipria, M: Satin Cloud, R: Special Surface (please specify)
On Request	Emergency [only B455], Motion Sensor [only B455]






Lens Louvre | Direct




Size mm	Lumen/Watt Medium Power
L155	1160lm/9W
L305	2310lm/19W
B455	2310lm/19W
L455	3470lm/28W
L605	4620lm/38W


Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

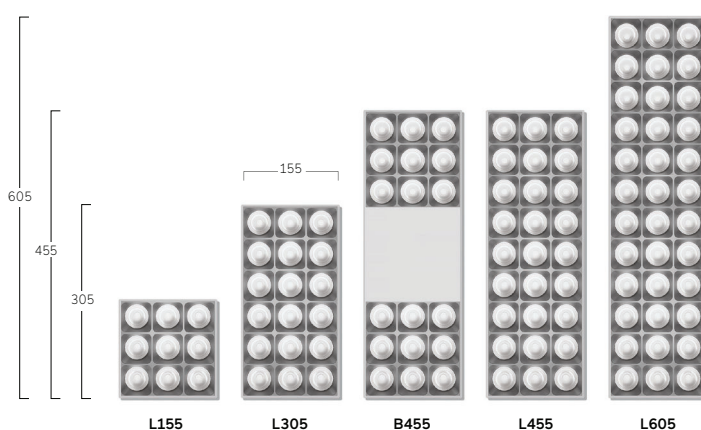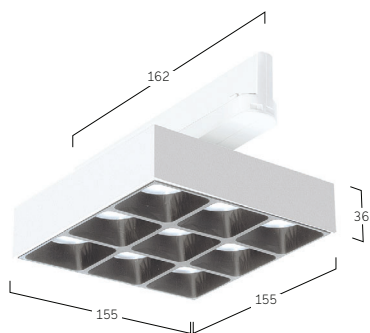


W Snow White
D Anodic Black




U Urban Graphite
V Ivory White




A Satin Silver
D Anodic Black



D Anodic Black



D Anodic Black
G Satin Gold



U Urban Graphite
K Satin Copper