


Square LED downlight for false ceiling and canopies. Heat-sink in anodized aluminium, frame in white painted steel, RAL 9010. Antivandal polycarbonat diffuser, matt or transparent. IK10. 4 mounting springs. Driver included. Made in Italy.



TECHNICAL DATA

BODY	Aluminium. Silver anodized
FRAME	Steel. White RAL9011
DIFFUSER	Antivandal transparent polycarbonat
LED type	Mid-power Lumileds 2835CA
LED colour	4000K
CRI	>90
FLUX	2527lm
WATTAGE	23W
LED NUMBER	52
LED DRIVER	500mA constant current, separated
CLASS	II
IK	10
IP	65
DIMENSIONS	175x175x60mm
CUT-OUT HOLE	165x165mm
WEIGHT	1,0kg
Ta	-20°C // +40°C

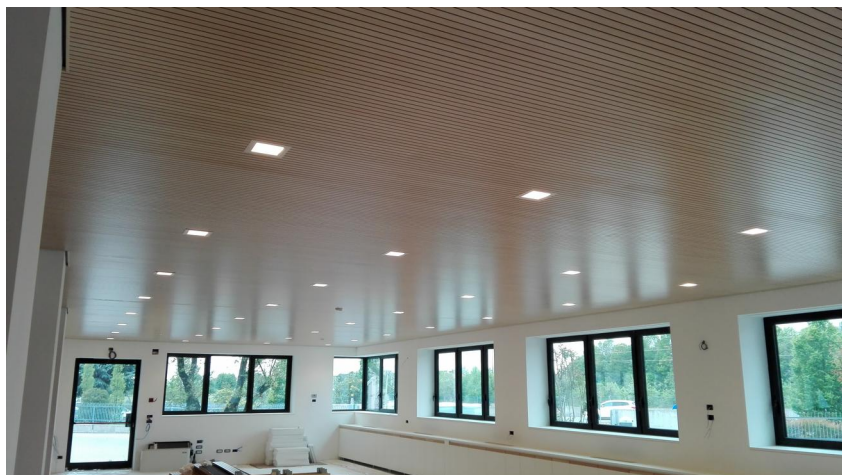

OPTIONS

- Emergency kit
- Dimmable ballast DALI
- Dimmable ballast 1-10V
- Casambi control
- Microprismatic diffuser
- PMMA diffuser
- Opal diffuser
- Different frame colours
- LED 2700K
- LED 3000K
- 230V ac LEDs
- IP40

