

# Cubic Evolution W4 | Wall



**DE** LED-Wandanbauleuchte. Direkt-indirektstrahlend. Leuchtenkörper in minimalistischer Bauhöhe aus Aluminiumprofil. Oberfläche natur-eloxiert oder weiß, graphit, schwarz bzw. champagnerfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Microprismenoptik mit optimierter Blendungsbegrenzung speziell für Office-Anwendungen. Satinierter Opaldiffusor für Allgemeinbeleuchtung mit max. Transmissionsgrad und homogener Lichtpunktauflösung. Konverter in Leuchtgehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI, Touch-Dim, Casambi). Farbtemperatur 2700K, 3000K, 3500K, 4000K oder 6500K. Binning initial  $\leq$  MacAdam 3. Farbwiedergabe CRI $>$ 80, CRI $>$ 90 oder Full Spectrum.


**EN** LED surface-mounted luminaire for walls and ceilings. Direct light distribution and indirect lighting corona or direct only light distribution. Luminaire body made of aluminium profile. Surface white, silver, graphite, black, copper or bronze coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Microprismatic screen with optimized glare reduction for workplaces. Satin opal diffuser for general lighting with maximum transmittance and uniformity. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI, Touch-Dim, Casambi). Colour temperature 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning  $\leq$  MacAdam 3. Colour rendering CRI $>$ 80, CRI $>$ 90 or Full Spectrum. On request: Integration of emergency lighting components.

**CW4OUE-830M-L600**

Product Family	<b>C:</b> Cubic
Type	<b>W4:</b> Direct-Indirect
Optical System	<b>A:</b> Microprismatic, <b>O:</b> Opal Diffuser
Surface Finish	<b>W:</b> Snow White, <b>V:</b> Ivory White, <b>F:</b> Anodic Silver, <b>U:</b> Urban Graphite, <b>D:</b> Anodic Black, <b>B:</b> Jet Black, <b>H:</b> Anodic Champagne, <b>K:</b> Satin Copper, <b>X:</b> Satin Bronze, <b>M:</b> Satin Cloud, <b>R:</b> Special Surface (please specify)
Control Gear	<b>E:</b> On/Off, <b>L:</b> DALI, <b>H:</b> Touch-Dim, <b>C:</b> Casambi
Colour Rendering	<b>8:</b> CRI>80, <b>9:</b> CRI>90, <b>F:</b> Full Spectrum [except 2200K]
Colour Temperature	<b>22:</b> 2200K, <b>27:</b> 2700K, <b>30:</b> 3000K, <b>35:</b> 3500K, <b>40:</b> 4000K, <b>65:</b> 6500K
Power	<b>M:</b> Medium Power
Size	Luminaire Length in mm: <b>L600</b>




**Microprismatic | Direct-Indirect**

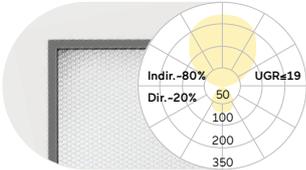


**L** Lumen/Watt  
**mm** Medium Power  
600 7180lm/44W

**Opal Diffuser | Direct-Indirect**

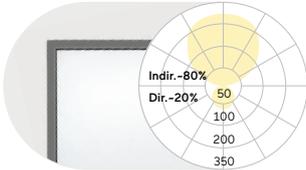

**L** Lumen/Watt  
**mm** Medium Power  
600 7140lm/44W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

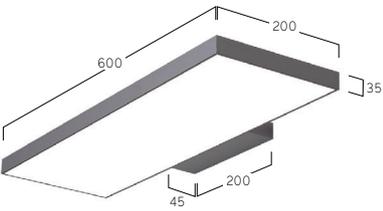

**W** Snow White



**F** Anodic Silver



**U** Urban Graphite



**B** Jet Black



**H** Anodic Champagne



**X** Satin Bronze