

Serenity (Round) P1 | Suspended



DE LED-Akustik-Pendelleuchte. Direkt-indirekt oder rein direktstrahlend. Schallabsorber für breites Frequenzspektrum zur Reduktion der Nachhallzeit. 3D-Textilstoff aus Trevira CS wahlweise in den Farben Cream, Taupe, Green und Anthracite. Direktanteil über Präzisionslinsen für rotationssymmetrische Lichtstärkeverteilung bei gleichzeitig hoher Blendungsbegrenzung (UGR<19) speziell für Office Anwendungen. Konverter in Leuchtengehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI, Touch-Dim, Casambi). Farbtemperatur 2700K, 3000K, 3500K, 4000K oder 6500K. Binning initial \leq MacAdam 3. Farbwiedergabe CRI>80, CRI>90 oder Full Spectrum. Stufenlos höhenverstellbare Parallel-Seilabhängung mit transparent ummantelter Zuleitung. Lackierung Baldachin passend Leuchtenkörper.


EN LED acoustic pendant luminaire. Direct-indirect or direct-only light distribution. Sound absorber for a wide frequency spectrum, to reduce the reverberation time. 3D textile fabric made of Trevira CS available in cream, taupe, green and anthracite. Direct light with precision lenses for uniform symmetrical light distribution with high glare limitation (UGR<19) for workplaces. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI, Touch-Dim, Casambi). Colour temperature 2700K, 3000K, 3500K, 4000K or 6500K. Binning \leq MacAdam 3. Colour rendering CRI>80, CRI>90 or Full Spectrum. Height-adjustable parallel cord suspension with transparent power supply cable. Ceiling rose to match luminaire body.

FP1 K 1 E-8 30 M-D930-K

- Product Family **F:** Serenity
- Type **P1:** Direct-Indirect
- Optical System **K:** Lens 24°
- Surface Finish **1:** Cream Fabric, **2:** Green Fabric, **3:** Taupe Fabric, **4:** Antracite Fabric
- Control Gear **E:** On/Off, **L:** DALI, **H:** Touch-Dim, **C:** Casambi
- Colour Rendering **8:** CRI>80, **9:** CRI>90, **F:** Full Spectrum [except 2200K]
- Colour Temperature **22:** 2200K, **27:** 2700K, **30:** 3000K, **35:** 3500K, **40:** 4000K, **65:** 6500K
- Power **E:** Low Power, **M:** Medium Power, **H:** High Power
- Size Luminaire Diameter in mm: **D930**
- Suspension **K:** Parallel Suspension, **U:** Central Suspension




Direct-Indirect

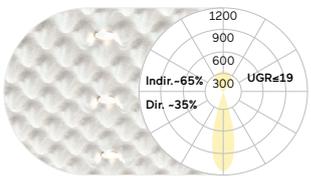

D mm	Lumen/Watt Low Power	Lumen/Watt Medium Power	Lumen/Watt High Power
930	5240lm/39W	8030lm/62W	11530lm/92W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

Parallel Suspension

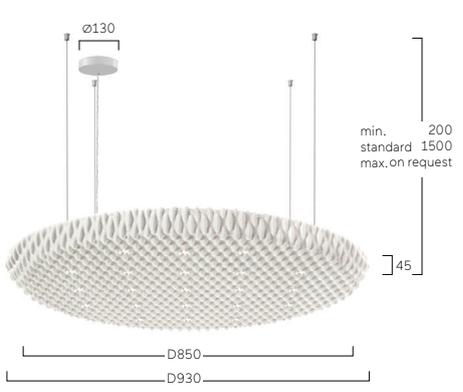

Central Suspension



**Acoustic Absorber only
FP1-1-D930-K**



1 Cream Fabric



2 Green Fabric



3 Taupe Fabric



4 Antracite Fabric