

## Liquid Line 40 WX | Wall



**DE** LED-Wandanbauleuchte. Direkt-indirektstrahlend. Leuchtenkörper mit feinen Rändern aus Aluminium, gefertigt aus einem Guss ohne sichtbare Nahtstellen an den Stirnseiten. Oberfläche weiß, silber, graphit, schwarz oder champagnerfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Satinierter Opaldiffusor für Allgemeinbeleuchtung mit max. Transmissionsgrad und homogener Lichtpunktauflösung. Konverter in Leuchtgehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI). Farbtemperatur 2200K, 2700K, 3000K, 4000K, 6500K oder Tunable White. Binning initial  $\leq$  MacAdam 3. Farbwiedergabe CRI>80. Auf Anfrage: Integration von Notlichtkomponenten.


**EN** LED wall mounted luminaire. Direct-indirect light distribution. Luminaire body with soft corners made of aluminium, crafted in one piece with no visible seams at the ends. Surface white, silver, graphite, black or champagne coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Satin opal diffuser for general lighting with maximum transmittance and uniformity. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI). Colour temperature 2200K, 2700K, 3000K, 4000K, 6500K or Tunable White. Binning  $\leq$  MacAdam 3. Colour rendering CRI>80. On request: Integration of emergency lighting components.

**Q W X O W E - 8 30 M - L1182**

Product Family	<b>Q:</b> Liquid Line
Type	<b>WX:</b> Direct-Indirect
Optical System	<b>O:</b> Opal Diffuser
Surface Finish	<b>W:</b> Snow White, <b>V:</b> Ivory White, <b>S:</b> Radiant Silver, <b>A:</b> Satin Silver, <b>F:</b> Anodic Silver, <b>U:</b> Urban Graphite, <b>D:</b> Anodic Black, <b>B:</b> Jet Black, <b>H:</b> Anodic Champagne, <b>K:</b> Satin Copper, <b>X:</b> Satin Bronze, <b>M:</b> Satin Cloud, <b>R:</b> Special Surface (please specify)
Control Gear	<b>E:</b> On/Off, <b>L:</b> DALI, <b>H:</b> Touch-Dim, <b>C:</b> Casambi, <b>6:</b> DALI DT6 for TW [L1182-L2055], <b>8:</b> DALI DT8 for TW [L890-L2055]
Colour Rendering	<b>8:</b> CRI>80, <b>9:</b> CRI>90, <b>F:</b> Full Spectrum [except 2200K]
Colour Temperature	<b>22:</b> 2200K, <b>27:</b> 2700K, <b>30:</b> 3000K, <b>35:</b> 3500K, <b>40:</b> 4000K, <b>65:</b> 6500K, <b>TW:</b> Tunable White 2700-6500K
Power	<b>M:</b> Medium Power, <b>H:</b> High Power
Size	Luminaire Length in mm: <b>L890, L1182, L1475, L1765, L2055</b>
On Request	Emergency Module [L1475-L2055]




**Opal Diffuser | Direct-Indirect**

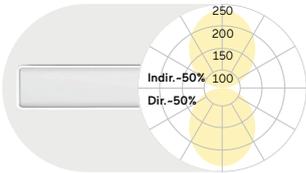

L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
890	3380lm/23W	4150lm/28W
1182	4580lm/32W	5620lm/39W
1475	5780lm/40W	7090lm/48W
1765	6980lm/47W	8560lm/58W
2055	8180lm/57W	10030lm/70W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

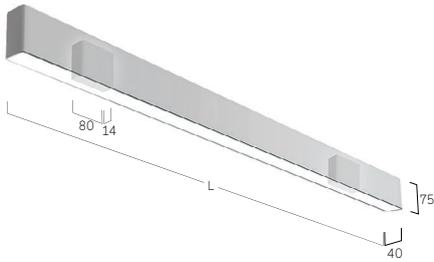

**W** Snow White



**S** Radiant Silver



**U** Urban Graphite



**B** Jet Black



**H** Anodic Champagne



**K** Satin Copper