

Cubic Evolution T2/T3 | Table




DE LED-Tischleuchte. Direkt-indirektstrahlend. Leuchtenkörper in minimalistischer Bauhöhe aus Aluminiumprofil. Oberfläche natureloxiert oder weiß, graphit, schwarz bzw. champagnerfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Microprismenoptik mit optimierter Blendungsbegrenzung speziell für Office-Anwendungen bei vollständiger Lichtpunktauflösung. Intuitives Bedienfeld im Leuchtenmast für getrennt stufenlose Dimmung und Schaltung der Kammern für Direkt-/Indirektlicht, alternativ gemeinsame Steuerung über modernste Sensor- oder Schwarmtechnologie. Farbtemperatur 2700K, 3000K, 3500K, 4000K, 6500K oder Tunable White (2700-6500K). Binning initial $\leq$ MacAdam 3. Farbwiedergabe CRI>80, CRI>90 oder Full Spectrum. Tischklammer aus Stahl, Lackierung passend Leuchtenkörper. 4m Anschlusskabel mit länderspezifischem Stecker (EU, CH, UK).


EN LED table luminaire. Direct-indirect light distribution. Luminaire body with minimalistic overall height made of aluminium profile. Surface natural anodised or white, graphite, black or champagne coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Microprismatic screen with optimized glare reduction for workplaces with uniform and enhanced light transmission. Intuitive control panel in luminaire pole for dimming and switching the direct/indirect light separately, alternatively joint control via advanced sensor or swarm technology. Colour temperature 2700K, 3000K, 3500K, 4000K, 6500K or Tunable White (2700-6500K). Binning $\leq$ MacAdam 3. Colour rendering CRI>80, CRI>90 or Full Spectrum. Steel table clamp, colour matching luminaire body. 4m power cable with country-specific plug (EU, CH, UK).

CT2AFX-830M-L630-T-AS

Product Family	C: Cubic
Type	T2: Direct-Indirect, T3: Direct-Indirect
Optical System	A: Microprismatic
Surface Finish	W: Snow White, V: Ivory White, E: Natural Anodised (Sharp Edge only), U: Urban Graphite, D: Anodic Black, B: Jet Black, H: Anodic Champagne, F: Anodic Silver, M: Satin Cloud, R: Special Surface (please specify)
Control Gear	X: Separately Dimmable, M: Multisensor, R: Swarm Control, C: Casambi
Colour Rendering	8: CRI>80, 9: CRI>90, F: Full Spectrum
Colour Temperature	27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K
Power	M: Medium Power, H: High Power
Size	Head Length in mm: L600, L630
Base	T: Table Clamp
Plug	A: Schuko CEE 7/7 (Type E+F), B: CH T12 (Type J), C: UK BS 1363 (Type G), D: Wieland, E: WAGO
Frame Design	S: Soft Edge, C: Sharp Edge

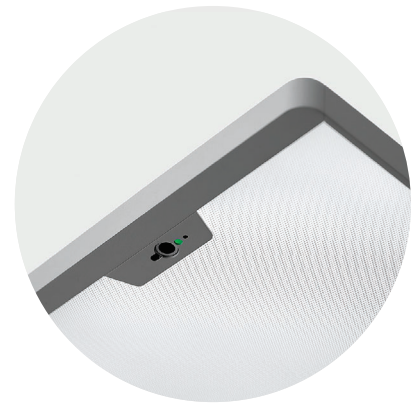
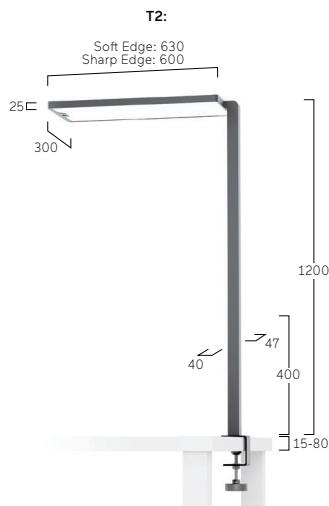
**T2: Microprismatic | Direct-Indirect**

L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
600/630	11300lm/67W	16000lm/93W

T3: Microprismatic | Direct-Indirect

L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
600/630	11700lm/71W	16500lm/99W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.




Soft Edge: Multisensor / Swarm Control



Sharp Edge: Multisensor / Swarm Control



Separately Dimmable

**W** Snow White**E** Natural Anodised
(Sharp Edge only)**U** Urban Graphite**B** Jet Black**H** Anodic Champagne