


CUBIC EVOLUTION  
SUSPENDED | G6/P6



**DE** LED-Pendelleuchte. Direkt-indirekt oder rein direktstrahlend. Leuchtenkörper in minimalistischer Bauhöhe aus Aluminiumprofil. Oberfläche naturelxiert oder weiß, graphit, schwarz bzw. champagnerfarben lackiert sowie Alu poliert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Microprismenoptik mit optimierter Blendungsbegrenzung speziell für Office-Anwendungen. Satinierter Opaldiffusor für Allgemeinbeleuchtung mit max. Transmissionsgrad und homogener Lichtpunktauflösung. Indirektanteil mit innovativer Linsentechnologie für breitstrahlende Deckenaufhellung. Konverter in Leuchtgehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (1-10V, DALI, Touch-Dim, Casambi). Farbtemperaturen 2700K, 3000K, 3500K oder 4000K. Binning initial  $\leq$  MacAdam 3. Farbwiedergabe CRI>80 oder CRI>90. Stufenlos höhenverstellbare Parallel-Seilabhängung mit transparent ummantelter Zuleitung.

**EN** LED pendant luminaire. Direct-indirect or direct-only light distribution. Luminaire body with minimalist overall height made of aluminium profile. Surface natural anodised or white, graphite, black or champagne coated as well as polished aluminium. Further surface options see Lightnet-Surface-Collection or RAL of your choice. Microprismatic with optimized glare reduction especially for workplaces. Satin opal diffuser for general lighting with maximum transmittance and homogeneous lighting. Indirect light with innovative lens technology for wide-angle ceiling illumination. Converter integrated into luminaire housing, optionally switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi). Colour temperature 2700K, 3000K, 3500K or 4000K. Binning initial  $\leq$  MacAdam 3. Colour rendering CRI>80 or CRI>90. Height-adjustable parallel-cord suspension with transparent power supply cable.

**FR** Luminaire LED suspendu. Éclairage direct/indirect ou seulement direct. Corps du luminaire en profilé aluminium et épaisseur minimaliste. Surface anodisée ou laquée blanc, graphite, noir, champagne ou polie. Autres options de finition voir Lightnet-Surface-Collection ou RAL au choix. Diffuseur microprismatique optimisé pour un éblouissement limité et adapté aux bureaux. Diffuseur opale satiné pour un éclairage général et une transmission maximale et homogène. Composants indirects avec une technologie de lentille innovante pour un éclairage grand angle du plafond. Driver intégré dans le luminaire, au choix ON/OFF ou graduable (1-10V, DALI, Touch-Dim, Casambi). Température de couleur 2700K, 3000K, 3500K ou 4000K. Binning initial  $\leq$  Mac Adam 3. Rendu de couleur CRI>80 ou CRI>90. Filin parallèle droit et tendeur rapide réglable avec câble d'alimentation transparent.

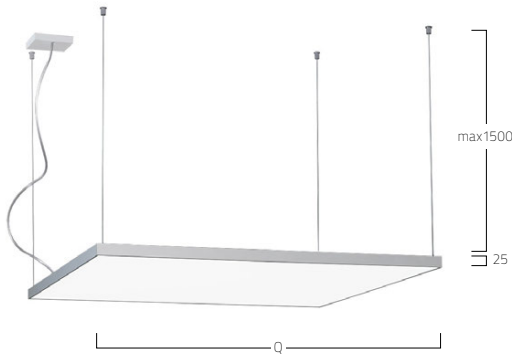


**PRODUCT-CODE: C P6 A B E - 8 30 M - Q600 - K**

|                |  |
|----------------|--|
| PRODUCT FAMILY | - C Cubic  |
| TYPE           | - P6 Direct-Indirect, G6 Direct Only   |
| OPTICAL SYSTEM | - A Microprismatic, O Opal Diffuser  |
| SURFACE FINISH | - W Snow White, E Silver Anodised, U Urban Graphite, B Jet Black, H Champagne Silver, P Polished Aluminium |
| CONTROL GEAR   | - E On/Off, L DALI, D 1-10V, H Touch-Dim, C Casambi, M Multisensor   |
| COLOUR REND.   | - 8 CRI>80, 9 CRI>90   |
| COLOUR TEMP.   | - 27 2700K, 30 3000K, 35 3500K, 40 4000K   |
| POWER          | - M Medium Power, H High Power   |
| SIZE           | - Square size in mm: Q300, Q400, Q500, Q600, Q800  |
| SUSPENSION     | - K Parallel Suspension  |
| ON REQUEST     | - Emergency Module, Radar Sensor, Cable colour: Red, Black   |




MICROPRISMATIC / DIRECT-INDIRECT



UGR $\leq$ 19 (X=4H, Y=8H, S=0.25H)  
DIRECT: ca.75% INDIRECT ca.25%

| L mm | Lumen/Watt Medium Power | Lumen/Watt High Power |
|------|-------------------------|-----------------------|
| 300  | 1600lm/13W              | 2360lm/20W            |
| 400  | 2590lm/19W              | 3570lm/27W            |
| 500  | 4490lm/33W              | 5860lm/44W            |
| 600  | 6670lm/46W              | 9240lm/66W            |
| 800  | 11240lm/78W             | 15080lm/110W          |

MICROPRISMATIC / DIRECT



UGR $\leq$ 19 for Medium Power (X=4H, Y=8H, S=0.25H)  
DIRECT: 100%

| L mm | Lumen/Watt Medium Power | Lumen/Watt High Power |
|------|-------------------------|-----------------------|
| 300  | 1250lm/11W              | 1820lm/16W            |
| 400  | 2150lm/16W              | 2950lm/24W            |
| 500  | 3330lm/26W              | 4350lm/34W            |
| 600  | 4810lm/35W              | 6630lm/50W            |
| 800  | 7920lm/57W              | 10650lm/78W           |


OPAL DIFFUSER / DIRECT-INDIRECT



DIRECT: ca.75% INDIRECT ca.25%

| L mm | Lumen/Watt Medium Power | Lumen/Watt High Power |
|------|-------------------------|-----------------------|
| 300  | 1560lm/13W              | 2300lm/20W            |
| 400  | 2560lm/19W              | 3530lm/27W            |
| 500  | 4450lm/33W              | 5800lm/44W            |
| 600  | 6610lm/46W              | 9110lm/66W            |
| 800  | 11150lm/78W             | 14960lm/110W          |

OPAL DIFFUSER / DIRECT



DIRECT 100%


| L mm | Lumen/Watt Medium Power | Lumen/Watt High Power |
|------|-------------------------|-----------------------|
| 300  | 1210lm/11W              | 1760lm/16W            |
| 400  | 2120lm/16W              | 2910lm/24W            |
| 500  | 3290lm/26W              | 4290lm/34W            |
| 600  | 4750lm/35W              | 6500lm/50W            |
| 800  | 7830lm/57W              | 10530lm/78W           |

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.



MULTISENSOR CONTROL

EMERGENCY MODULE

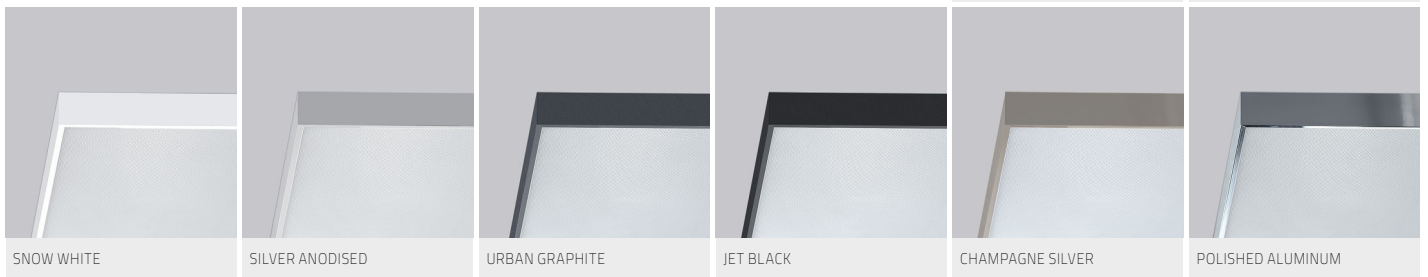

SNOW WHITE

SILVER ANODISED

URBAN GRAPHITE

JET BLACK

CHAMPAGNE SILVER

POLISHED ALUMINIUM