

Liquid Line 40 TY | Table




DE LED-Arbeitsplatzleuchte. Direktstrahlend. Leuchtenkörper mit feinen Radien aus Aluminium, gefertigt aus einem Guss ohne sichtbare Nahtstellen. Oberfläche weiß, silber, graphit, schwarz oder champagnerfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Direktanteil über Präzisionslinsen mit Abblendraster für breite rotationssymmetrische Lichtstärkeverteilung bei gleichzeitig hoher Blendungsbegrenzung ($UGR < 19$). Abblendraster in verschiedenen Farbkombinationen erhältlich. Intuitives Bedienfeld im Leuchtenmast für stufenlose Dimmung. Farbtemperatur 2700K, 3000K, 3500K, 4000K oder 6500K. Binning initial $\leq$ MacAdam 3. Farbwiedergabe $CRI > 80$, $CRI > 90$ oder Full Spectrum. Wahlweise mit Fußplatte aus Stahl oder Tischklammer. Länderspezifische Adapter (EU, CH, UK) im Lieferumfang enthalten.

EN LED task light. Direct only light distribution. Luminaire body with soft corners made of aluminium, crafted in one piece with no visible seams. Surface white, silver, graphite, black or champagne coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Direct light using precision lenses with louvre for wide uniform symmetrical light distribution with high glare limitation ($UGR < 19$). Louvre available in various colour finishes. Intuitive pole mounted control panel for dimming. Colour temperature 2700K, 3000K, 3500K, 4000K or 6500K. Binning $\leq$ MacAdam 3. Colour rendering $CRI > 80$, $CRI > 90$ or Full Spectrum. Country-specific adapters (EU, CH, UK) included. Optionally available with steel base plate or table clamp.


Q TYLWS-830M-L936-TG

Product Family	Q: Liquid Line
Type	TY: Direct only
Optical System	L: Lens Louvre
Surface Finish	W: Snow White, V: Ivory White, S: Radiant Silver, A: Satin Silver, F: Anodic Silver, U: Urban Graphite, D: Anodic Black, B: Jet Black, H: Anodic Champagne, K: Satin Copper, X: Satin Bronze, M: Satin Cloud, R: Special Surface (please specify)
Control Gear	S: Switch & Dimm, N: Motion Sensor
Colour Rendering	8: CRI>80, 9: CRI>90, F: Full Spectrum
Colour Temperature	27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K, TW: Tunable White 2700-6500K
Power	M: Medium Power
Size	Head Length in mm: L936
Base	G: Rectangular Base, U: U-Cut-Out Base, T: Table Clamp, R: Table Grommet
Lens Louvre	W: Snow White, V: Ivory White, A: Satin Silver, F: Anodic Silver, D: Anodic Black, K: Satin Copper, G: Satin Gold, J: Satin Pale Gold, L: Satin Cipria, M: Satin Cloud, R: Special Surface (please specify)

**Lens Louvre | Direct**

Size	Power	Lumen/Watt
936	Medium Power	2500lm/16W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

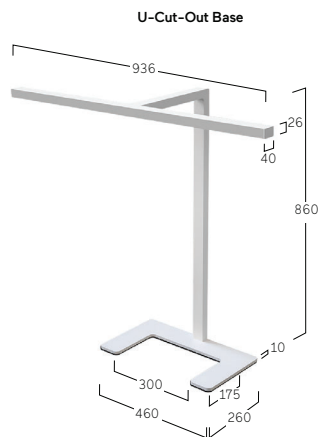**Rectangular Base**

Rectangular Base





U-Cut-Out Base



Table Clamp



Table Grommet

**W** Snow White
W Snow White**W** Snow White
A Satin Silver**W** Snow White
D Anodic Black**W** Snow White
G Satin Gold**W** Snow White
K Satin Copper**W** Snow White
J Satin Pale Gold