

Midpin G4/G7 | Single Suspended




DE LED-Strahler für Pendelmontage. Direktstrahlend. Konverter in Leuchtgehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI). Gehäuse aus Aluminium in weiß, silber, schwarz oder champagnerfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Farbtemperatur wahlweise 2700K, 3000K oder 4000K oder als Dim to Warm 3000K-1800K. Farbwiedergabe CRI>90. Binning initial \leq MacAdam 3. Wahlweise Linsen- oder Reflektoroptiken in verschiedenen Ausstrahlwinkeln. Optikring in verschiedenen Farbausführungen erhältlich. Zuleitungskabel wahlweise transparent, rot oder schwarz.

EN LED spotlight for pendant mounting. Direct only light distribution. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI). Housing made of white, silver, black or champagne coated aluminum. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Colour temperature available as 2700K, 3000K or 4000K or as Dim to Warm 3000K-1800K. Colour rendering CRI>90. Binning \leq MacAdam 3. Optional lens or reflector optics in various beam angles. Optic ring available in different colour versions. Optional transparent, red or black power supply cable.

D G4 1 F E - 9 27 M - L500-G B

Product Family	D: Midpin
Type	G4: Direct only [Ø40mm], G7: Direct only [Ø55mm]
Optical System	1: Lens 15°, 2: Lens 24°, 3: Lens 36°, 4: Lens 60°, 5: Reflector 15° [only Ø40mm], 6: Reflector 24°, 7: Reflector 36°, 8: Reflector 50°
Surface Finish	W: Snow White, V: Ivory White, S: Radiant Silver, F: Anodic Silver, U: Urban Graphite, D: Anodic Black, B: Jet Black, H: Anodic Champagne, K: Satin Copper, X: Satin Bronze, M: Satin Cloud, R: Special Surface (please specify)
Control Gear	E: On/Off, L: DALI, H: Touch-Dim
Colour Rendering	9: CRI>90
Colour Temperature	27: 2700K, 30: 3000K, 40: 4000K, DW: Dim to Warm 3000K-00K [DALI only]
Power	E: Low Power, M: Medium Power
Size	Luminaire Length in mm: L105, L250, L500
Optic Ring	W: Snow White, V: Ivory White, A: Satin Silver, F: Anodic Silver, D: Anodic Black, K: Satin Copper, G: Satin Gold, J: Satin Pale Gold, L: Satin Cipria, M: Satin Cloud, R: Special Surface (please specify)
Cable Colour	T: Transparent, R: Red, B: Black

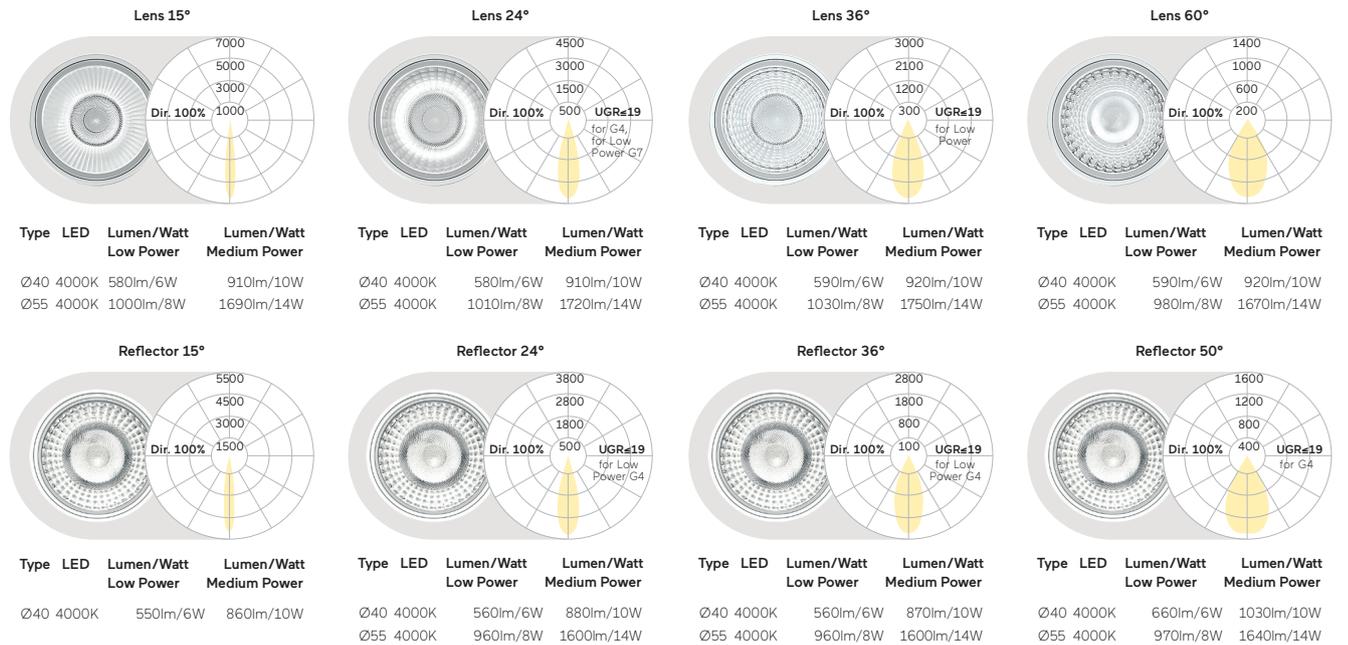

Lumen Values: Luminaire luminous flux at 4000K/CRI>90. Other configurations on request.

