

Cubic Déco Y3/X3 | Wall



DE LED-Anbauleuchte für Wand- und Deckenmontage. Direktstrahlend. Leuchtenkörper aus Aluminiumprofil. Rückversetzte Optik für bessere Blendungsbegrenzung und dekorative Lichtwirkung. Gehäuse-Außenfläche und rundum laufender Reflektorring in unterschiedlichen Lackierungen und Kombinationen erhältlich, z.B. weiß, silber, graphit, schwarz, gold oder kupferfarben. Zu Oberflächenoptionen- und Kombinationen siehe Lightnet-Surface-Collection oder Bi-Colour-Auswahl. Microprismenoptik aus Acrylglas mit optimierter Blendungsbegrenzung speziell für Office-Anwendungen. Satinierter Opaldiffusor für Allgemeinbeleuchtung mit max. Transmissionsgrad und homogener Lichtpunktauflösung. Konverter in Leuchtengehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI, Touch-Dim, Casambi). Farbtemperatur 2200K, 2700K, 3000K, 3500K, 4000K, 6500K oder Tunable White (2700-6500K). Binning initial \leq MacAdam 3. Farbwiedergabe CRI>80, CRI>90 oder Full Spectrum. Auf Anfrage: Integration von Notlichtkomponenten.


EN LED surface-mounted luminaire for walls and ceilings. Direct only light distribution. Luminaire body made of aluminium profile. Recessed screen with optimized glare reduction and decorative lighting impact. Outer housing and all-round reflector ring available in various finishes and combinations, e.g. white, silver, graphite, black, gold or copper coated. For surface options and combinations, see Lightnet-Surface-Collection or Bi-Colour selection. Microprismatic screen made of special acrylic glass with optimized glare reduction especially for workplaces. Satin opal diffuser for general lighting with maximum transmittance and uniformity. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI, Touch-Dim, Casambi). Colour temperature 2200K, 2700K, 3000K, 3500K, 4000K, 6500K or Tunable White (2700-6500K). Binning \leq MacAdam 3. Colour rendering CRI>80, CRI>90 or Full Spectrum. On request: Integration of emergency lighting components.

CY3AFE-830M-Q310-G

- Product Family **C:** Cubic
- Type **X3:** Direct-Indirect, **Y3:** Direct Only
- Optical System **A:** Microprismatic, **O:** Opal Diffuser
- Surface Finish **W:** Snow White, **V:** Ivory White, **F:** Anodic Silver, **U:** Urban Graphite, **D:** Anodic Black, **B:** Jet Black, **H:** Anodic Champagne, **K:** Satin Copper, **X:** Satin Bronze, **M:** Satin Cloud, **R:** Special Surface (please specify)
- Control Gear **E:** On/Off, **L:** DALI, **H:** Touch-Dim, **C:** Casambi, **6:** DALI DT6 for TW, **8:** DALI DT8 for TW
- Colour Rendering **8:** CRI>80, **9:** CRI>90, **F:** Full Spectrum [except 2200K, TW]
- Colour Temperature **22:** 2200K, **27:** 2700K, **30:** 3000K, **35:** 3500K, **40:** 4000K, **65:** 6500K, **TW:** Tunable White 2700-6500K [Q400-Q800]
- Power **M:** Medium Power, **H:** High Power
- Size Square Size in mm: **Q310, Q410, Q510, Q610, Q810**
- Reflector **W:** Snow White, **V:** Ivory White, **A:** Satin Silver, **F:** Anodic Silver, **D:** Anodic Black, **K:** Satin Copper, **G:** Satin Gold, **J:** Satin Pale Gold, **L:** Satin Cipria, **M:** Satin Cloud, **R:** Special Surface (please specify)
- On Request Emergency Module




Microprismatic | Direct-Indirect

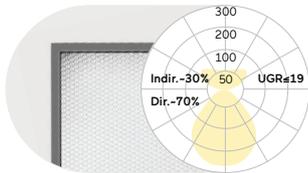


Q mm	Lumen/Watt Medium Power	Lumen/Watt High Power
310	1800lm/13W	3060lm/22W
410	3010lm/21W	4210lm/30W
510	4380lm/32W	5670lm/41W
610	6540lm/46W	9460lm/67W
810	10820lm/71W	15150lm/100W

Microprismatic | Direct

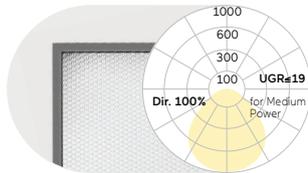


Q mm	Lumen/Watt Medium Power	Lumen/Watt High Power
310	1130lm/9W	1930lm/15W
410	2070lm/15W	2870lm/21W
510	3110lm/23W	4050lm/31W
610	4720lm/35W	6820lm/51W
810	7770lm/51W	10610lm/71W

Opal Diffuser | Direct-Indirect

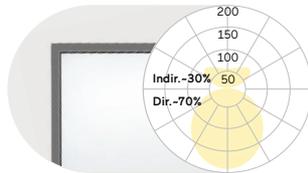


Q mm	Lumen/Watt Medium Power	Lumen/Watt High Power
310	1750lm/13W	2960lm/22W
410	2860lm/21W	3990lm/30W
510	4190lm/32W	5420lm/41W
610	6290lm/46W	9090lm/67W
810	10800lm/71W	15120lm/100W

Opal Diffuser | Direct

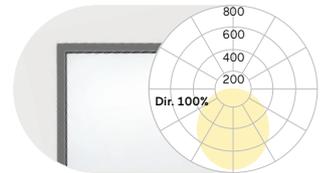

Q mm	Lumen/Watt Medium Power	Lumen/Watt High Power
310	1080lm/9W	1830lm/15W
410	1910lm/15W	2650lm/21W
510	2920lm/23W	3800lm/31W
610	4470lm/35W	6450lm/51W
810	7750lm/51W	10580lm/71W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

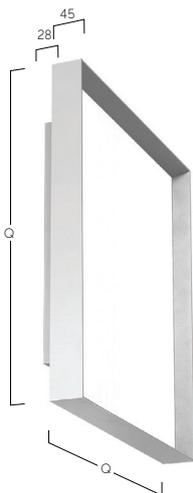

F Anodic Silver
W Snow White



F Anodic Silver
F Anodic Silver



F Anodic Silver
D Anodic Black



F Anodic Silver
G Satin Gold



F Anodic Silver
J Satin Pale Gold



F Anodic Silver
K Satin Copper