

Basic Ambient G6/P6 | Suspended



DE LED-Pendelleuchte. Direkt-rundumstrahlend. Leuchtenkörper aus Aluminiumprofil und Diffusor mit 60mm Bauhöhe. Microprismenoptik mit optimierter Blendungsbegrenzung speziell für Office-Anwendungen. Satinierter Opaldiffusor für Allgemeinbeleuchtung mit max. Transmissionsgrad und homogener Lichtpunktauflösung. Optikring weiß, silber, graphit, schwarz, champagner oder kupferfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Konverter in Leuchtengehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI, Touch-Dim, Casambi). Farbtemperaturen 2200K, 2700K, 3000K, 3500K, 4000K oder 6500K. Binning initial \leq MacAdam 3. Farbwiedergabe CRI $>$ 80 oder CRI $>$ 90. Stufenlos höhenverstellbare Zentral-Seilabhängung mit transparent ummantelter Zuleitung oder Pendelrohrabhängung. Lackierung Pendelrohr passend Leuchtenkörper. Auf Anfrage: Integration von Notlichtkomponenten, Sensortechnologie.


EN LED pendant luminaire. Direct omnidirectional light distribution. Luminaire body made of aluminium profile and diffuser with overall height of 60mm. Microprismatic screen with optimized glare reduction for workplaces. Satin opal diffuser for general lighting with maximum transmittance and uniformity. Optic ring white, silver, graphite, black, champagne or copper coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI, Touch-Dim, Casambi). Colour temperature 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning \leq MacAdam 3. Colour rendering CRI $>$ 80 or CRI $>$ 90. Height-adjustable central cord suspension with transparent power supply cable or rod suspension. Rod suspension in matching colour to the luminaire body. On request: Integration of emergency lighting components, sensor technology.

BP6 A U E-8 30 M-D402-P

Product Family	B: Basic
Type	P6: Direct-Indirect, G6: Direct only
Optical System	A: Microprismatic, O: Opal
Surface Finish	W: Snow White, V: Ivory White, S: Radiant Silver, A: Satin Silver, F: Anodic Silver, U: Urban Graphite, D: Anodic Black, B: Jet Black, H: Anodic Champagne, K: Satin Copper, X: Satin Bronze, M: Satin Cloud, R: Special Surface (please specify)
Control Gear	E: On/Off, L: DALI, H: Touch-Dim, C: Casambi
Colour Rendering	8: CRI>80, 9: CRI>90, F: Full Spectrum [except 2200K]
Colour Temperature	22: 2200K, 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K
Power	M: Medium Power, H: High Power
Size	Luminaire Diameter in mm (Microprismatic): D302, D402, D502, D612 Luminaire Diameter in mm (Opal): D295, D395, D495, D605
Suspension	P: Tube Suspension [D395-D612], U: Central Suspension




Microprismatic | Direct-Indirect

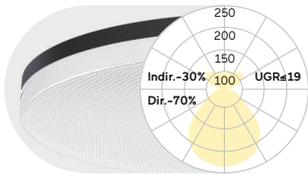


D mm	Lumen/Watt Medium Power	Lumen/Watt High Power
302	1570lm/11W	2380lm/16W
402	2540lm/18W	3970lm/27W
502	3810lm/26W	5590lm/38W
612	5560lm/37W	8340lm/56W

Microprismatic | Direct

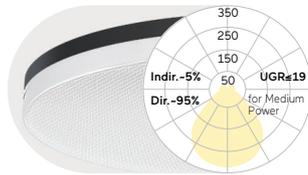


D mm	Lumen/Watt Medium Power	Lumen/Watt High Power
302	1140lm/9W	1730lm/13W
402	1890lm/14W	2970lm/21W
502	2760lm/19W	4080lm/28W
612	4030lm/28W	6110lm/42W

Opal Diffuser | Direct-Indirect

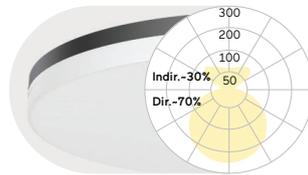

D mm	Lumen/Watt Medium Power	Lumen/Watt High Power
295	1690lm/11W	2560lm/16W
395	2740lm/18W	4280lm/27W
495	4100lm/26W	6020lm/38W
605	5980lm/37W	8980lm/56W


Opal Diffuser | Direct

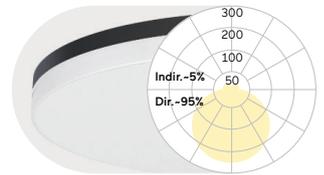

D mm	Lumen/Watt Medium Power	Lumen/Watt High Power
295	1260lm/9W	1910lm/13W
395	2090lm/14W	3280lm/21W
495	3050lm/19W	4510lm/28W
605	4450lm/28W	6750lm/42W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.


Microprismatic | Tube Suspension

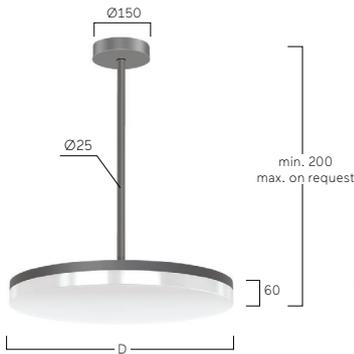

Microprismatic | Central Suspension



Opal Diffuser | Tube Suspension

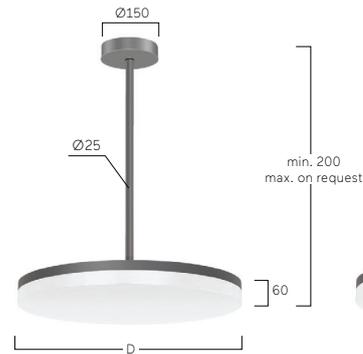

Opal Diffuser | Central Suspension



W Snow White



S Radiant Silver



U Urban Graphite



B Jet Black



H Anodic Champagne



K Satin Copper