


## Matric 40 JX | Wall



**DE** LED-Anbauleuchte für horizontale Wandmontage. Rein indirektstrahlend. Lichtkanal aus Aluminiumprofil. Millimetergenaue Längenfertigung nach Vorgabe möglich. Oberfläche natureloxiert oder weiß, graphit, schwarz, champagner oder kupferfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Hochwertige Microprismenoptik für indirekten Sicht- und Staubschutz sowie gerichtete Wand-/ Deckenverteilung des Lichts. Konverter in Leuchtgehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI, Touch-Dim, Casambi). Farbtemperatur 2200K, 2700K, 3000K, 3500K, 4000K, 6500K oder Tunable White (2700-6500K). Binning initial  $\leq$  MacAdam 3. Farbwiedergabe CRI $>$ 80, CRI $>$ 90 oder Full Spectrum.


**EN** LED surface-mounted luminaire for horizontal wall mounting. Indirect only light distribution. Light channel made of aluminium profile. Bespoke lengths are possible. Surface natural anodised or white, graphite, black, champagne or copper coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. High-quality microprismatic screen for indirect visual and dust protection as well as directional wall/ceiling light distribution. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI, Touch-Dim, Casambi). Colour temperature 2200K, 2700K, 3000K, 3500K, 4000K, 6500K or Tunable White (2700-6500K). Binning  $\leq$  MacAdam 3. Colour rendering CRI $>$ 80, CRI $>$ 90 or Full Spectrum.

**L JXAUL - 8 30 M - L890**

Product Family	<b>L:</b> Matric
Type	<b>JX:</b> Indirect only
Optical System	<b>A:</b> Microprismatic
Surface Finish	<b>W:</b> Snow White, <b>V:</b> Ivory White, <b>E:</b> Natural Anodised, <b>U:</b> Urban Graphite, <b>D:</b> Anodic Black, <b>B:</b> Jet Black, <b>H:</b> Anodic Champagne, <b>K:</b> Satin Copper, <b>X:</b> Satin Bronze, <b>M:</b> Satin Cloud, <b>R:</b> Special Surface (please specify)
Control Gear	<b>E:</b> On/Off, <b>L:</b> DALI, <b>H:</b> Touch-Dim, <b>C:</b> Casambi
Colour Rendering	<b>8:</b> CRI>80, <b>9:</b> CRI>90, <b>F:</b> Full Spectrum [except 2200K]
Colour Temperature	<b>22:</b> 2200K, <b>27:</b> 2700K, <b>30:</b> 3000K, <b>35:</b> 3500K, <b>40:</b> 4000K, <b>65:</b> 6500K, <b>TW:</b> Tunable White 2700-6500K [L1182-L2055]
Power	<b>M:</b> Medium Power, <b>H:</b> High Power
Size	Luminaire Length in mm: <b>L890, L1182, L1475, L1765, L2055</b>
On Request	Emergency Module [L1475-L2055]



**Microprismatic | Indirect**

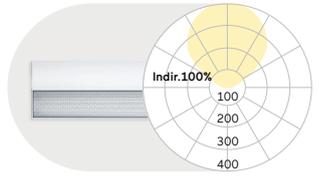

L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
890	1720lm/14W	2420lm/19W
1182	2290lm/18W	3230lm/25W
1475	2870lm/22W	4040lm/31W
1765	3440lm/27W	4840lm/38W
2055	4010lm/32W	5650lm/45W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

