


Basic

APPARECCHIO CIRCOLARE IN PMMA
ROUND LUMINAIRE IN PMMA


BASIC ORIENTABILE

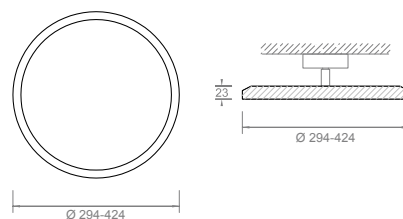


CEILING

BASIC 29 CE - LED 18W
2700K 1600lm or 4000K 1700lm
230VAC RA 80 IP20 / IP54 - **1,2 kg**
BASIC 42 CE - LED 22W
2700K 2100lm or 4000K 2200lm
230VAC RA 80 IP20 / IP54 - **1,5 kg**

FINITURA / FINISHING:
bianco / white ○

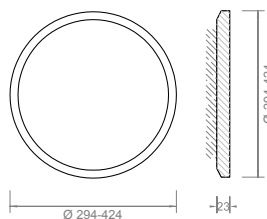

WALL

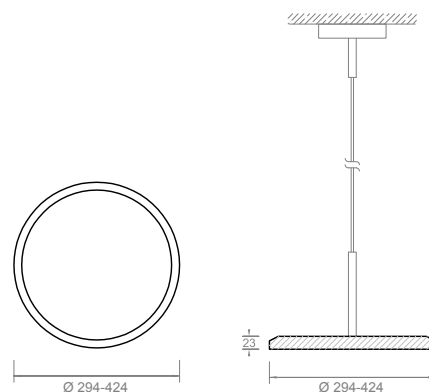

PENDANT

