

Midpoint Déco P1 | Suspended



DE LED-Strahler für Pendelmontage. Direktstrahlend. Rückversetzte sphärische Linse für breitstrahlende Lichtverteilung (70°) und dekorativem konischen Reflektor. Gehäuse-Außenfläche und dekorativer Reflektor in unterschiedlichen Lackierungen und Kombinationen erhältlich, z.B. weiß, silber, graphit, schwarz, gold oder kupferfarben lackiert. Zu Oberflächenoptionen- und Kombinationen siehe Lightnet-Surface-Collection oder Bi-Colour-Auswahl. Linse optional mit Magic Colour Filter für colorierte Lichteffekte. Konverter in Leuchtgehäuse integriert, einfach schaltbar oder stufenlos dimmbar (DALI, TRIAC, Casambi). Farbtemperatur 2700K, 3000K, 3500K, 4000K, Tunable White oder Dim to Warm. Binning initial \leq MacAdam 3. Farbwiedergabe $\text{CRI} > 90$. Zuleitungskabel wahlweise transparent, rot oder schwarz.


EN LED spotlight for pendant mounting. Direct only light distribution. Recessed spherical lens for wide-angle light distribution (70°) and decorative conical reflector. Outer housing and decorative reflector available in various finishes and combinations, e.g. white, silver, graphite, black, gold or copper coated. For surface options and combinations, see Lightnet-Surface-Collection or Bi-Colour selection. Lens optionally with Magic Colour Filter for coloured lighting effects. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI, TRIAC, Casambi). Colour temperature 2700K, 3000K, 3500K, 4000K, Tunable White or Dim to Warm. Binning \leq MacAdam 3. Colour rendering $\text{CRI} > 90$. Optional transparent, red or black power supply cable.

PP1DFE-927M-L210-KO-B

Product Family	P: Midpoint Déco
Type	P1: Direct
Optical System	D: Lens 70°
Surface Finish	W: Snow White, V: Ivory White, S: Radiant Silver, F: Anodic Silver, U: Urban Graphite, D: Anodic Black, B: Jet Black, H: Anodic Champagne, K: Satin Copper, X: Satin Bronze, M: Satin Cloud, R: Special Surface (please specify)
Control Gear	E: On/Off, L: DALI
Colour Rendering	9: CRI>90, 8: CRI>80, 2: CRI>97, 3: CRI>97 (Fashion White), 4: CRI>97 (Fashion Colour)
Colour Temperature	27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, TW: Tunable White 2700-6500K [L500, L800]
Power	M: Medium Power H: High Power
Size	Luminaire Length in mm: L210, L500, L800
Cone Surface	W: Snow White, V: Ivory White, A: Satin Silver, F: Anodic Silver, D: Anodic Black, K: Satin Copper, G: Satin Gold, J: Satin Pale Gold, L: Satin Cipria, M: Satin Cloud, R: Special Surface (please specify)
Filter	O: Satin, F: Magic Colour
Cable Colour	T: Transparent, R: Red, B: Black




70° Deep Cone Lens

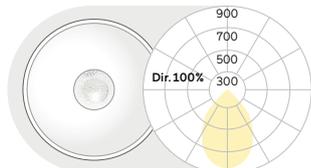

D mm	Lumen/Watt Medium Power	Lumen/Watt High Power
95	2480lm/20W	3480lm/29W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

PP1: L210, L500, L800mm

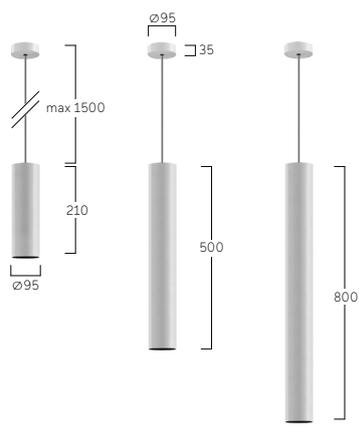

Magic Colour Filter



W Snow White
W Snow White
F Anodic Silver
F Anodic Silver
D Anodic Black
M Satin Cloud
M Satin Cloud
B Jet Black
K Satin Copper
X Satin Bronze
G Satin Gold