


# CUBIC EVOLUTION WALL | J4



**DE** LED-Wand-Anbauleuchte. Rein indirektstrahlend. Leuchtenkörper in minimalistischer Bauhöhe aus Aluminiumprofil. Oberfläche natureloxiert oder weiß, graphit, schwarz bzw. champagnerfarben lackiert sowie Alu poliert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Indirektanteil mit innovativer Linsentechnologie für breitstrahlende Deckenaufhellung. Konverter in Leuchtengehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI, TD). Farbtemperaturen 2700K, 3000K, 3500K oder 4000K. Binning initial  $\leq$  MacAdam 3. Farbwiedergabe CRI>80 oder CRI>90. Durchdachtes Montagesystem für einfache Installation und stabilen Halt.

**EN** LED wall mounted luminaire. Indirect only light distribution. Luminaire body with minimalistic overall height made of aluminium profile. Surface natural anodised or white, graphite, black or champagne coated as well as polished aluminium. Further surface options see Lightnet-Surface-Collection or RAL of your choice. Indirect light with innovative lens technology for wide-angle ceiling illumination. Converter integrated into luminaire housing, optionally switchable or dimmable (DALI, TD). Colour temperature 2700K, 3000K, 3500K or 4000K. Binning initial  $\leq$  MacAdam 3. Colour rendering CRI>80 or CRI>90. Sophisticated mounting system for easy installation and stable hold.

**FR** Applique murale LED. Éclairage seulement indirect. Corps du luminaire en profilé aluminium et épaisseur minimaliste. Surface anodisée ou laquée blanc, graphite, noir, champagne ou polie. Autres options de finition voir Lightnet-Surface-Collection ou RAL au choix. Composants indirects avec une technologie de lentille innovante pour un éclairage grand angle du plafond. Driver intégré dans le luminaire, au choix ON/OFF ou graduable (DALI, TD). Température de couleur 2700K, 3000K, 3500K ou 4000K. Binning initial  $\leq$  MacAdam 3. Rendu de couleur CRI>80 ou CRI>90. Système de montage sophistiqué pour une installation facile et stable.

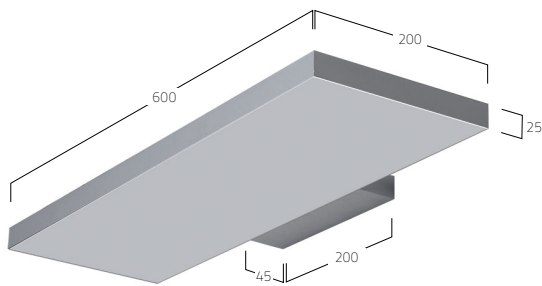


**PRODUCT-CODE:** C J4 U B E - 8 30 M - L600

PRODUCT FAMILY	- C: Cubic
TYPE	- J4: Wall mounted Indirect
OPTICAL SYSTEM	- U: Indirect Optic
SURFACE FINISH	- W: Snow White, E: Silver Anodised, U: Urban Graphite, B: Jet Black, H: Champagne Silver, P: Polished Aluminium
CONTROL GEAR	- E: On/Off, L: DALI, H: Touch Dim
COLOUR REND.	- 8: CRI>80, 9: CRI>90
COLOUR TEMP.	- 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K
POWER	- M: Medium Power
SIZE	- Luminaire length in mm: L600



INDIRECT OPTIC



INDIRECT 100%

L mm	Lumen/Watt Medium Power
600	3680lm/28W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

