


CALEO LINEAR
RECESSED | L3



DE LED-Einbauleuchte für rahmenlose Montage in Gipskartondecken. Rein direktstrahlend. Lichtkanal aus Aluminiumprofil mit 55mm Lichtspur-Breite. Oberfläche silber. Microprismenoptik mit optimierter Blendungsbegrenzung speziell für Office-Anwendungen. Satinierter Opaldiffusor für Allgemeinbeleuchtung. Konverter in Leuchtgehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (1-10V, DALI, Touch-Dim, Casambi). Farbtemperaturen 2200K, 2700K, 3000K, 3500K, 4000K oder 6500K. Binning initial ≤ MacAdam 3. Farbwiedergabe CRI>80 oder CRI>90. Befestigungsset inklusive. Leuchtenprofil für Montage vorab lieferbar; restliche Leuchtenkomponenten zeitlich versetzt montierbar.



EN Recessed mounted LED luminaire for frameless installation in plasterboard ceilings. Direct only light distribution. Light channel made of aluminium profile with 55mm track width. Surface silver. Microprismatic with optimized glare reduction especially for workplaces. Satin opal diffuser for general lighting. Converter integrated into luminaire housing, optionally switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi). Colour temperatures 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning initial ≤ MacAdam 3. Colour rendering CRI>80 or CRI>90. Mounting brackets included. Luminaire profile available in advance for mounting; other luminaire components can be mounted at different times.

FR Luminaire LED encastré sans cadre pour plafonds en placo-plâtre. Éclairage seulement direct. Rail lumineux en profilé d'aluminium avec une largeur d'éclairage de 55mm. Surface argent. Diffuseur microprismatique optimisé pour un éblouissement limité et adapté aux bureaux. Diffuseur opale satinée pour un éclairage général. Driver intégré dans le luminaire, au choix ON/OFF ou graduable (1-10V, DALI, Touch-Dim, Casambi). Température de couleur 2200K, 2700K, 3000K, 3500K, 4000K ou 6500K. Binning initial ≤ MacAdam 3. Rendu de couleur CRI>80 ou CRI>90. Cadre de montage et kit de fixations inclus. Cadre de montage en encastré ou profilé vide livrable et disponible en avance; montage possible des composants restants du luminaire, ultérieurement.

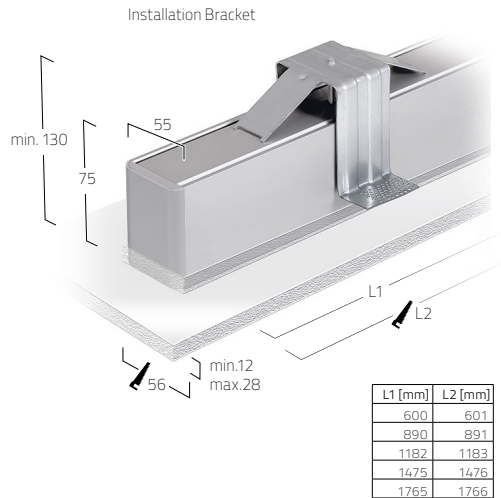

PRODUCT-CODE: A L3 O E E - 8 30 M - L600

- PRODUCT FAMILY - A Caleo
- TYPE - L3 Direct Only
- OPTICAL SYSTEM - O Opal, A Microprismatic
- SURFACE FINISH - E Silver Anodised
- CONTROL GEAR - E On/Off, L DALI, D 1-10V, H Touch-Dim, C Casambi
- COLOUR REND. - 8 CRI>80, 9 CRI>90, F Full Spectrum
- COLOUR TEMP. - 22 2200K, 27 2700K, 30 3000K, 35 3500K, 40 4000K, 65 6500K
- POWER - M: Medium Power, H: High Power
- SIZE - Luminaire length in mm: L600, L894, L1182, L1475, L1765
- ON REQUEST - Emergency Module

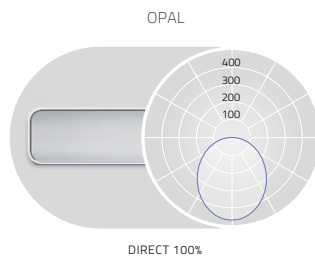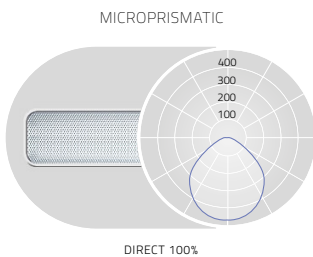

L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
600	1060lm/16W	1530lm/24W
894	1580lm/22W	2290lm/34W
1182	2110lm/28W	3050lm/43W
1475	2640lm/34W	3820lm/52W
1765	3170lm/40W	4580lm/62W

L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
600	1490lm/16W	2160lm/24W
894	2240lm/22W	3230lm/34W
1182	2980lm/28W	4310lm/43W
1475	3730lm/34W	5390lm/52W
1765	4470lm/40W	6470lm/62W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.