

Cubic Evolution F1 | Floor



DE LED-Stehleuchte. Direkt-indirektstrahlend. Leuchtenkörper in minimalistischer Bauhöhe aus Aluminiumprofil. Oberfläche naturelxiert oder weiß, graphit, schwarz bzw. champagnerfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Microprismenoptik mit optimierter Blendungsbegrenzung speziell für Office-Anwendungen bei vollständiger Lichtpunktauflösung. Intuitives Bedienfeld im Leuchtenmast für getrennt stufenlose Dimmung und Schaltung der Kammern für Direkt-/Indirektlicht, bei Tunable White oder Integration von Multisensor- oder Schwarmtechnologie gemeinsame Steuerung der Lichtkammern. Optional: HCL-Control für automatisches, dem Tagesverlauf angepasstes, biodynamisches Licht. Farbtemperatur 2700K, 3000K, 3500K, 4000K, 6500K oder Tunable White (2700- 6500K). Binning initial \leq MacAdam 3. Farbwiedergabe CRI>80, CRI>90 oder Full Spectrum. Fußplatte aus Stahl für unterschiedliche Tischausführungen, Lackierung passend Leuchtenkörper. 4m Anschlusskabel mit länderspezifischem Stecker (EU, CH, UK).


EN LED free-standing luminaire. Direct-indirect light distribution. Luminaire body with minimalistic overall height made of aluminium profile. Surface natural anodised or white, graphite, black or champagne coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Microprismatic screen with optimized glare reduction for workplaces with uniform and enhanced light transmission. Intuitive pole mounted control panel for dimming and switching the direct/indirect light separately, joint control of the light chambers with Tunable White or integration of multi-sensor or swarm technology. Optional: HCL Control for automatic, time dependent, biodynamic lighting. Colour temperature 2700K, 3000K, 3500K, 4000K, 6500K or Tunable White (2700- 6500K). Binning \leq MacAdam 3. Colour rendering CRI>80, CRI>90 or Full Spectrum. Steel base plate for different table designs, colour matching luminaire body. 4m power cable with country-specific plug (EU, CH, UK).

CF1AWX-830H-L900-U-AC

Product Family	C: Cubic
Type	F1: Direct-Indirect
Optical System	A: Microprismatic
Surface Finish	W: Snow White, V: Ivory White, E: Natural Anodised (Sharp Edge only), U: Urban Graphite, D: Anodic Black, B: Jet Black, H: Anodic Champagne, F: Anodic Silver, M: Satin Cloud, R: Special Surface (please specify)
Control Gear	X: Separately Dimmable, M: Multisensor, R: Swarm Control, B: HCL, C: Casambi
Colour Rendering	8: CRI>80, 9: CRI>90, F: Full Spectrum [except 2200K, TW]
Colour Temperature	27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K, TW: Tunable White 2700-6500K
Power	M: Medium Power, H: High Power
Size	Head Length in mm: L900, L930
Base	I: T-Shape, U: U-Shape
Plug	A: Schuko CEE 7/7 (Type E+F), B: CH T12 (Type J), C: UK BS 1363 (Type G), D: Wieland, E: WAGO
Frame Design	S: Soft Edge, C: Sharp Edge




Microprismatic | Direct-Indirect | Soft Edge

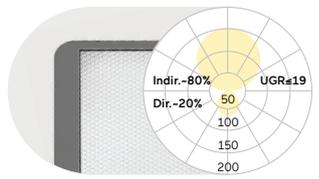

L	Lumen/Watt	Lumen/Watt
mm	Medium Power	High Power
930	15300lm/93W	17700lm/111W

Microprismatic | Direct-Indirect | Sharp Edge

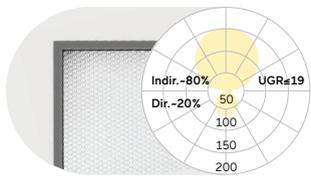


L	Lumen/Watt	Lumen/Watt
mm	Medium Power	High Power
900	15300lm/93W	17700lm/111W

Lumen Values: Luminarie luminous flux at 4000K/CRI>80. Other configurations on request.



Soft Edge: Multisensor / Swarm Control/ HCL

T-Shape Base

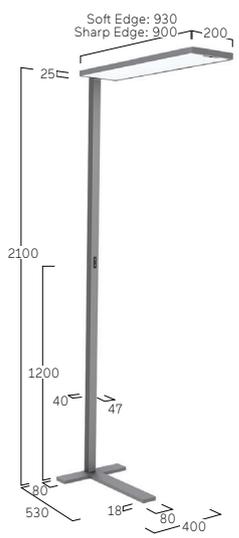


U-Shape Base



Sharp Edge: Multisensor / Swarm Control/ HCL



Separately Dimmable

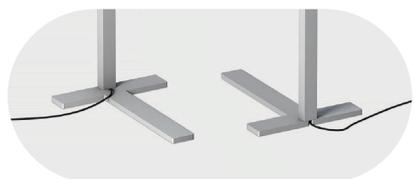

Flexible Cable Outlet



W Snow White



E Natural Anodised (Sharp Edge only)



U Urban Graphite



B Jet Black



H Anodic Champagne



M Satin Cloud