

Liquid Line Compact C5 | 3-Phase Track




DE LED-Strahler für 3-Phasen-Stromschienen. 345° drehbar und 90° schwenkbar. Leuchtenkörper mit feinen Radien aus Aluminium, gefertigt aus einem Guss ohne sichtbare Nahtstellen an den Stirnseiten. Oberfläche in weiß, silber, graphit, schwarz oder champagnerfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet Surface Collection oder RAL nach Wahl. Präzisionslinsen mit Abblendraster für breite rotations-symmetrische Lichtstärkeverteilung bei gleichzeitig hoher Blendungs-begrenzung (UGR<19). Bicolour Option durch andersfarbiges Abblend-raster in sämtlichen Oberflächenfarben. Konverter in Leuchtengehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI). Farbtemperatur 2200K, 2700K, 3000K, 3500K, 4000K oder 6500K. Binning initial $\leq$ MacAdam 3. Farbwiedergabe CRI>80 oder CRI>90.


EN LED spotlight for 3-phase tracks. 345° rotation and 90° tilt. Luminaire body with soft corners made of aluminium, crafted in one piece with no visible seams at the ends. Surface white, silver, graphite, black or champagne coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Precision lenses with louvre for wide uniform symmetrical light distribution with high glare limitation (UGR<19). Bicolour option with different-coloured louvre in all surface colours. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI). Colour temperature 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning $\leq$ MacAdam 3. Colour rendering CRI>80 or CRI>90.

Q C5 LWE - 8 30 H - L139-WD

Product Family	Q: Liquid Line
Type	C5: 3-Phase Track
Optical System	O: Opal Diffuser, L: Lens Louvre
Surface Finish	W: Snow White, V: Ivory White, S: Radiant Silver, A: Satin Silver, F: Anodic Silver, U: Urban Graphite, D: Anodic Black, B: Jet Black, H: Anodic Champagne, K: Satin Copper, X: Satin Bronze, M: Satin Cloud, R: Special Surface (please specify)
Control Gear	E: On/Off, L: DALI
Colour Rendering	8: CRI>80, 9: CRI>90, F: Full Spectrum [except 2200K]
Colour Temperature	22: 2200K, 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K
Power	M: Medium Power, H: High Power
Size	Luminaire Length in mm: L139
Adaptor	W: In-House Electronic [white], B: In-House Electronic [black]
Lens Louvre	W: Snow White, V: Ivory White, A: Satin Silver, F: Anodic Silver, D: Anodic Black, K: Satin Copper, G: Satin Gold, J: Satin Pale Gold, L: Satin Cipria, M: Satin Cloud, R: Special Surface (please specify)

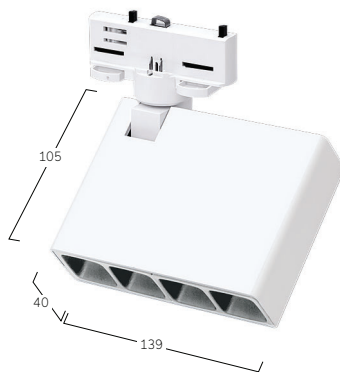
**Lens Louvre | Direct**

L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
139	790lm/6W	1140lm/8W

Opal Diffuser | Direct

L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
139	870lm/9W	1130lm/12W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.



W Snow White
W Snow White



W Snow White
A Satin Silver



W Snow White
D Anodic Black



W Snow White
G Satin Gold



W Snow White
K Satin Copper



W Snow White
J Satin Pale Gold