

Matric System 25: Midpin 40&55 R4/R7



DE Midpin LED-Strahler für modulares Matric 48V-Stromschienensystem. Pendelausführung, direktstrahlend. Gehäuse aus Aluminium in unterschiedlichen Lackierungen und Kombinationen erhältlich, z.B. weiß, silber, graphit, schwarz, gold oder kupferfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet Surface Collection oder RAL nach Wahl. Adapter immer schwarz. Farbtemperatur wahlweise 2700K, 3000K oder 4000K oder als Dim to Warm 3000K-1800K. Farbwiedergabe CRI>90. Binning initial $\leq$ MacAdam 3. Linsen- oder Reflektoroptiken mit unterschiedlichen Ausstrahlwinkeln. Optikring in verschiedenen Farbausführungen erhältlich. Wahlweise einfach schaltbar oder stufenlos dimmbar (DALI).


EN Midpin LED spotlight for modular Matric 48V track system. Pendant version, direct only light distribution. Aluminium housing available in various finishes and combinations, e.g. white, silver, graphite, black, gold or copper coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Adapter always black. Colour temperature available as 2700K, 3000K or 4000K or as Dim to Warm 3000K-1800K. Colour rend ring CRI>90. Binning $\leq$ MacAdam 3. Lens or reflector optics with different beam angles. Optic ring available in different colour versions. Optionally switchable or dimmable (DALI).

D R4 1WE-927M-L500-DT

Product Family	D: Midpin
Type	R4: Pendant Spotlight Ø40mm, R7: Pendant Spotlight Ø55mm
Optical System	1: Lens 15°, 2: Lens 24°, 3: Lens 36°, 4: Lens 60°, 5: Reflector 15° [only Ø40mm], 6: Reflector 24°, 7: Reflector 36°, 8: Reflector 50°
Surface Finish	W: Snow White, V: Ivory White, S: Radiant Silver, F: Anodic Silver, U: Urban Graphite, D: Anodic Black, B: Jet Black, H: Anodic Champagne, K: Satin Copper, X: Satin Bronze, M: Satin Cloud, R: Special Surface (please specify)
Control Gear	E: On/Off, L: DALI
Colour Rendering	9: CRI>90
Colour Temperature	27: 2700K, 30: 3000K, 40: 4000K, DW: Dim to Warm 3000K-1800K [DALI only]
Power	E: Low Power, M: Medium Power
Size	Luminaire Length in mm: L105 , L250 , L500
Optic Ring	W: Snow White, V: Ivory White, A: Satin Silver, F: Anodic Silver, D: Anodic Black, K: Satin Copper, G: Satin Gold, J: Satin Pale Gold, L: Satin Cipria, M: Satin Cloud, R: Special Surface (please specify)
Cable Colour	T: Transparent, R: Red, B: Black



Lens 15°				Lens 24°				Lens 36°				Lens 60°			
Type	LED	Lumen/Watt	Lumen/Watt	Type	LED	Lumen/Watt	Lumen/Watt	Type	LED	Lumen/Watt	Lumen/Watt	Type	LED	Lumen/Watt	Lumen/Watt
		Low Power	Medium Power			Low Power	Medium Power			Low Power	Medium Power			Low Power	Medium Power
Ø40	4000K	580lm/5,9W	910lm/10,0W	Ø40	4000K	580lm/5,9W	910lm/10,0W	Ø40	4000K	590lm/5,9W	920lm/10,0W	Ø40	4000K	590lm/5,9W	920lm/10,0W
Ø55	4000K	1000lm/7,8W	1690lm/13,3W	Ø55	4000K	1010lm/7,8W	1720lm/13,3W	Ø55	4000K	1030lm/7,8W	1750lm/13,3W	Ø55	4000K	980lm/7,8W	1670lm/13,3W
Reflector 15°				Reflector 24°				Reflector 36°				Reflector 50°			
Type	LED	Lumen/Watt	Lumen/Watt	Type	LED	Lumen/Watt	Lumen/Watt	Type	LED	Lumen/Watt	Lumen/Watt	Type	LED	Lumen/Watt	Lumen/Watt
		Low Power	Medium Power			Low Power	Medium Power			Low Power	Medium Power			Low Power	Medium Power
Ø40	4000K	550lm/5,9W	860lm/10,0W	Ø40	4000K	560lm/5,9W	880lm/10,0W	Ø40	4000K	560lm/5,9W	870lm/10,0W	Ø40	4000K	660lm/5,9W	1030lm/10,0W
Ø55	4000K	960lm/7,8W	1600lm/13,3W	Ø55	4000K	960lm/7,8W	1600lm/13,3W	Ø55	4000K	960lm/7,8W	1600lm/13,3W	Ø55	4000K	970lm/7,8W	1640lm/13,3W

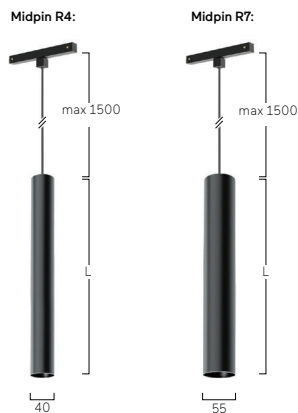

Lumen Values: Luminaire luminous flux at 4000K/CRI>90. Other configurations on request.

