

Beam Me Up T1 | Mini Table Office




DE LED-Arbeitsplatzleuchte mit rückversetzter Optik und dekorativem Reflektoring. Direkt-indirektstrahlend. Leuchterschirm aus hochwertig verarbeitetem Kunstguss. Gehäuse-Außenfläche und dekorativer Reflektoring in unterschiedlichen Lackierungen und Kombinationen erhältlich, z.B. weiß, silber, graphit, schwarz, gold oder kupferfarben lackiert. Zu Oberflächenoptionen- und Kombinationen siehe Lightnet-Surface-Collection oder Bi-Colour-Auswahl. Microprismenoptik mit optimierter Blendungsbegrenzung speziell für Office-Anwendungen. Satinierter Opaldiffusor für homogene Lichtpunktauflösung. Intuitives Bedienfeld im Leuchtenmast für getrennt stufenlose Dimmung und Schaltung der Kammern für Direkt-/Indirektlicht. Farbtemperatur 2200K, 2700K, 3000K, 3500K, 4000K, 6500K. Binning initial $\leq$ MacAdam 3. Farbwiedergabe CRI>80, CRI>90 oder Full Spectrum. Wahlweise mit Tischklammer, Tischaufsatzbefestigung, USM-Haller-Adapter oder – auf Anfrage – mit Sonderbefestigung erhältlich. 4m Anschlusskabel mit länderspezifischem Stecker (EU, CH, UK).


EN LED task light with rebated lens optic set in a decorative ring. Direct-indirect light distribution. Luminaire shade made of high-quality processed synthetic cast. Outer housing and decorative reflector ring available in various finishes and combinations, e.g. white, silver, graphite, black, gold or copper coated. For surface options and combinations, see Lightnet-Surface-Collection or Bi-Colour selection. Microprismatic screen with optimized glare reduction for workplaces. Satin opal diffuser for homogeneous lighting. Intuitive control panel in luminaire pole for dimming and switching the direct/indirect light separately. Colour temperature 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning $\leq$ MacAdam 3. Colour rendering CRI>80, CRI>90 or Full Spectrum. Optionally available with table clamp, table top attachment, USM Haller adapter or - upon request - with special attachment. 4m power cable with country-specific plug (EU, CH, UK).

M T1 A F X-8 30M-D450-TG-A

Product Family	M: Beam Me Up
Type	T1: Direct-Indirect
Optical System	A: Microprismatic, O: Opal Diffuser
Surface Finish	V: Ivory White, F: Anodic Silver, U: Urban Graphite, D: Anodic Black, H: Anodic Champagne, K: Satin Copper, X: Satin Bronze, M: Satin Cloud, R: Special Surface (please specify)
Control Gear	X: Separately Dimmable, C: Casambi
Colour Rendering	8: CRI>80, 9: CRI>90, F: Full Spectrum [except 2200K]
Colour Temperature	22: 2200K, 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K
Power	M: Medium Power
Size	Head Diameter in mm: D450
Base	T: Table Clamp
Reflector	W: Snow White, V: Ivory White, A: Satin Silver, F: Anodic Silver, D: Anodic Black, K: Satin Copper, G: Satin Gold, J: Satin Pale Gold, L: Satin Cipria, M: Satin Cloud, R: Special Surface (please specify)
Plug	A: Schuko CEE 7/7 (Type E+F), B: CH T12 (Type J), C: UK BS 1363 (Type G), D: Wieland, E: WAGO

**Microprismatic | Direct-Indirect**

D mm	Lumen/Watt Medium Power
450	11600lm/75W

Opal Diffuser | Direct-Indirect

D mm	Lumen/Watt Medium Power
450	11600lm/75W

Lumen Values: Luminarie luminous flux at 4000K/CRI>80. Other configurations on request.

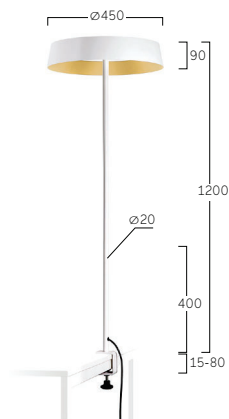


Table Clamp



Separately Dimmable

**W** Snow White
G Satin Gold**W** Snow White
K Satin Copper**F** Anodic Silver
D Anodic Black**D** Anodic Black
A Satin Silver**D** Anodic Black
G Satin Gold**D** Anodic Black
L Satin Cipria